



Timberix™ Microperforated V 3.6/1.8/0.5



Trademark and 2019 ©

Timberix™ Microperforated panel is made with a 2-layer perforation structure, which traps and diffracts sound in the holes. The sound that passes through the perforation is further absorbed by an acoustic substrate such as fibreglass or mineral wool, which reduces reverberation in the room.

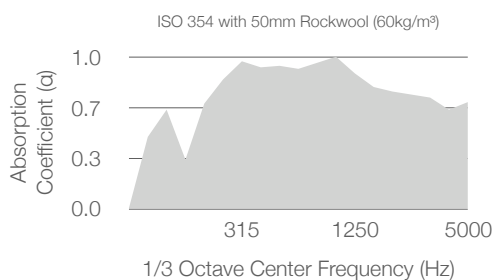

Technical Specifications

Structure	Basic Material, Finishing & Fleece
Material	E1 MDF, FR MDF, MgO Composite, etc.
Front Surface	Melamine, PP, Wood Veneer, Paint, etc.
Standard Dimension	600mm x 600mm, 600mm x 1200mm, 1200mm x 1200mm, 1200mm x 2400mm
Standard Thickness	15mm
Distances Between Two Holes	3.6/1.8mm
Diameter Of Holes	0.5mm
Standard Patterns	3.6/1.8/0.5mm (V)
Edges	Unfinished (for concealed edges) Veneered with edge banding (for exposed edges)
Eco-Friendly Test	EN 13986 = E1
Fire-Rated Test	EN 13501-1 = Class B s1, d0
Acoustic Test	ISO 354 = NRC 0.89 with 50mm Rockwool (60kg/m³)