



Timberix™ Data Center Perforated System

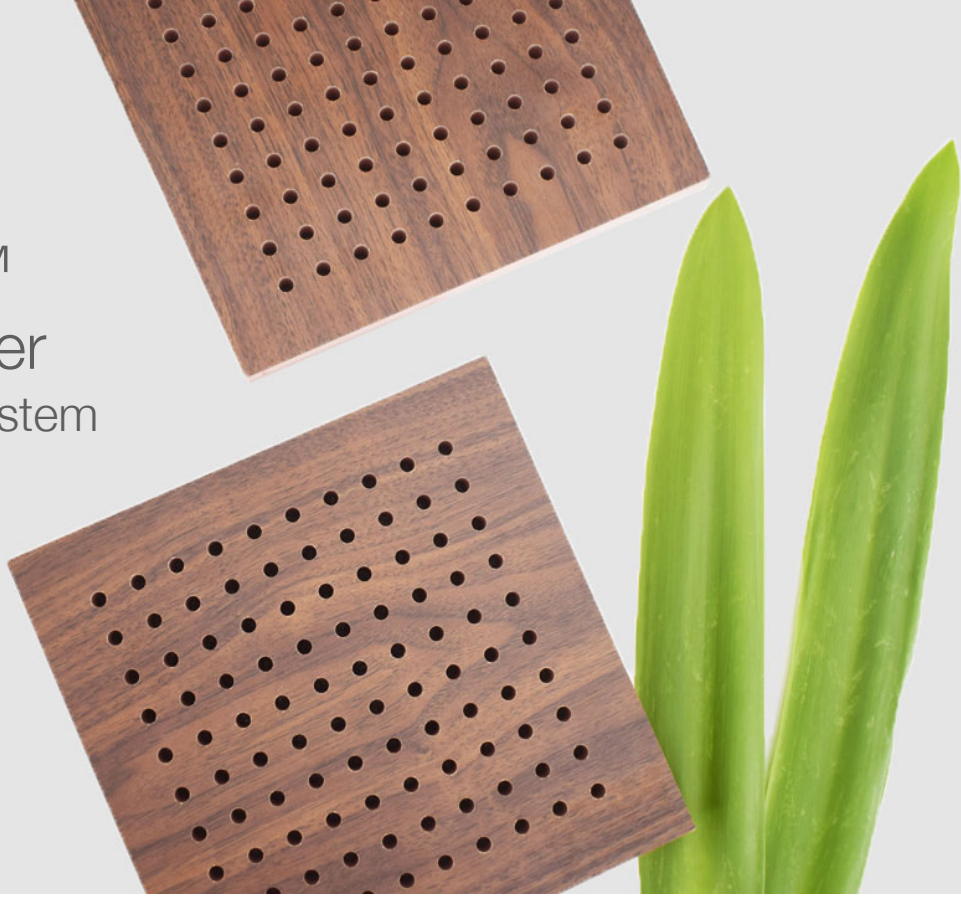

Trademark and 2025 ©

Timberix™ Data Center Perforated acoustic panels combine exceptional sound diffusion with a natural, elegant finish, making them perfect for data centers. Designed to reduce noise from servers and HVAC systems, these panels meet stringent fire safety and environmental standards.

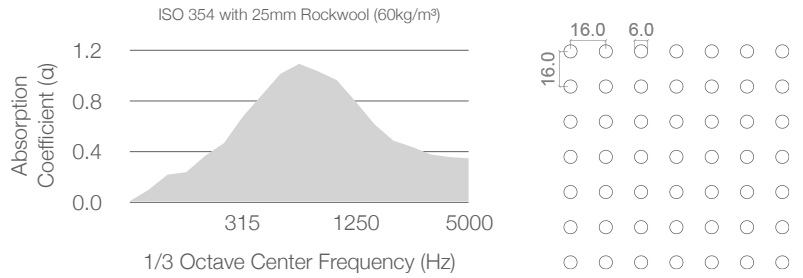

Technical Specifications

Structure	Basic Material, Finishing & Fleece
Material	E1 MDF, FR MDF, MgO Composite
Front Surface	Melamine, Veneer, Paint
Standard Dimension	600mm x 600mm, 600mm x 1200mm, 1200mm x 2400mm
Standard Thickness	15mm
Distances Between Two Holes	16/16mm
Diameter Of Holes	6mm
Standard Pattern	16/16/6mm (E)
Open Area	11.04%
Edge Banding	None, PVC, ABS
Formaldehyde Emission	EN 13986 = E1
Fire Classification	EN 13501-1 = Class B s1, d0
Sound Absorption	ISO 354 = NRC 0.89 with 50mm Rockwool (60kg/m³)
LEED Certification	Low-Emitting Products