



# Timberix™ Microperforated E 2/2/0.5



Trademark and 2025 ©

Timberix™ Microperforated panel is made with a 2-layer perforation structure, which traps and diffracts sound in the holes. The sound that passes through the perforation is further absorbed by an acoustic substrate such as fibreglass or mineral wool, which reduces reverberation in the room.

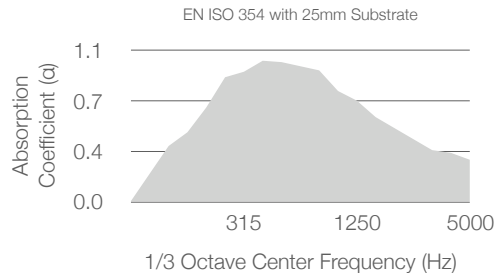

## Technical Specifications

Structure	Basic Material, Finishing & Fleece
Material	E1 MDF, FR MDF, MgO Composite
Front Surface	Melamine, Veneer, Paint
Standard Dimension	600mm x 600mm, 600mm x 1200mm, 1200mm x 2400mm
Standard Thickness	12mm, 15mm, 18mm
Distances Between Two Holes	2/2mm
Diameter Of Holes	0.5mm
Standard Pattern	2/2/0.5mm (E)
Open Area	4.91%
Edge Banding	None, PVC, ABS
Eco-Friendly Test	EN 13986, E1
Fire-Rated Test	ASTM E84-12a Class A, BS476 [Part 7] Class 1
Acoustic Test	BS EN ISO 354:2003, NRC = 0.75 (with 25mm substrate)